



Mini Rear Trigger Spray Nozzle Model RTB16

Available in Bronze and Stainless Steel

Features


- Heavy duty durable construction
- ½" Female NPT connection
- Single piece stainless steel or bronze body
- Stainless steel valve stem and components
- Nitrile o-ring seals and Viton™ valve seat
- Comfortable hand grip
- Easy operation – designed to reduce fatigue
- Replaceable rubber body cover provides temperature insulation and protects spray nozzle from extensive wear
- Easy repair—all components are user serviceable
- Rebuild kits readily available
- Front loading cartridge

Material

- Body: C89833 Lead-free Bronze or 304 SS
- Seals: Nitrile rubber o-rings and Viton™ valve seat
- Internals: 304 SS
- Handle: 304 SS
- Cover: Nitrile

Performance Ratings

- Minimum supply pressure: 25 psi (1.7 bar)
- Maximum supply pressure: 150 psi (10.3 bar)
- Maximum operating temperature: 200°F (93°C)
- Flow Rate: 2-5 gpm

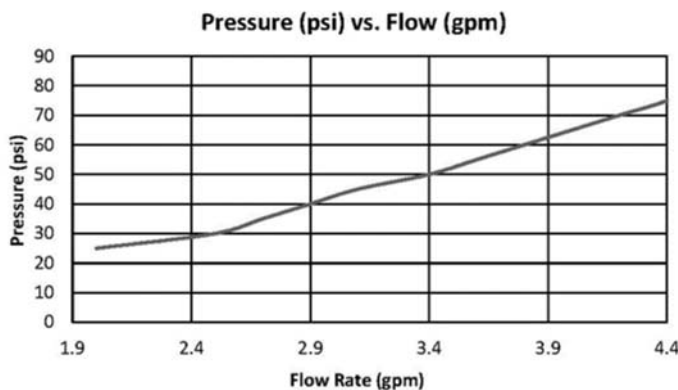

Ordering Information

Item	Description
RTB16-BB	Bronze Spray Nozzle / Black Cover
RTB16-SB	Stainless Steel Spray Nozzle / Black Cover

Spare Parts Ordering Information

Item	Description	Qty.
RTB16-06	Handle, SS, RTB16	1
RTB16-17	Rubber Cover, RTB16	1
RTB16-18	Front Body Bushing, RTB16	1
RTB16-27	Stem Assembly, RTB16	1
56018-003	O-Ring, #2-018, BUNA	1

800.554.1394

357 Spook Rock Rd | Suffern, NY | 10901
 sales@ARCHONind.com
 Fax 845.368.3040