




Standard design

- Wetted materials: 1.4571 or 1.4404 attachment parts from 1.4301
- With soda-lime glass, acc. DIN8902
- Plastic handles with stainless steel handles
- Silicone gasket
- With hinge and plastic knob
- Neck length 150 mm, neck thickness 4 mm
- Surface: unpolished, glass-bead blasted

Options

- Wetted materials: 1.4435 BN2, 1.4539, 1.4529, 1.4462, 1.4429, HC-22, HC-276, HC-2000, etc.
- With Borosilicate glass DIN7080
- Intermediate sizes
- Various gasket qualities
- Various surface qualities (glass-bead blasted, pickled or polished up to $Ra < 0,2 \mu m$)
- Neck length up to 2000 mm, neck thickness up to 20 mm
- Conical design of the neck (up to max. 8 mm neck thickness)
- Neck shaped to match tank-diameter
- Various handles: Stainless steel handle, toggle, nuts, etc.
- Cover side swiveling
- With wedge for side installation
- Locking pin in open position

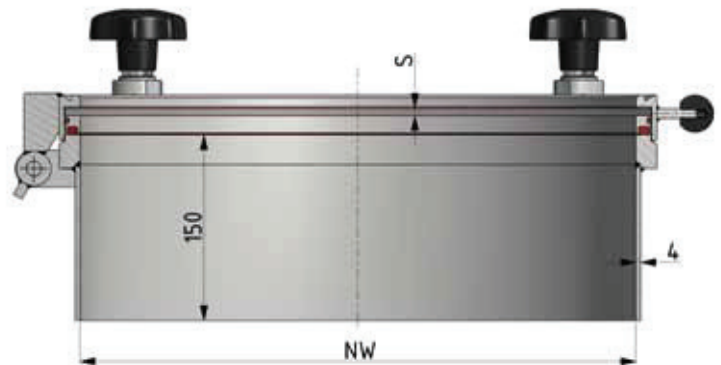

- Spring assists (torsion-, disc-, or gaspring)
- With various limit- or proximity-switches
- With safety-grill or safety-cross
- With wiper and/or light
- With customer symbol blasted into the glass
- Attachment parts in other materials

Article No.	NW	Number of screws M16	Thickness of glass pane (S) [mm]	Weight [kg]	Price in EUR
332 004	200	4	6	13	
332 504	250	4	6	15	
333 004	300	4	6	17	
333 504	350	4	6	19	
334 004	400	4	6	21	
334 504	450	4	6	23	
335 004	500	4	6	27	
336 004	600	4	6	31	

Gaskets see Chapter 9.1 and 9.3

Glass panes see chapter 8.7

