



MODEL FT18 – FRONT TRIGGER SPRAY NOZZLE

Description:

ARCHON Model FT18 is a heavy-duty spray nozzle for use in industrial washdown applications. They are widely used in food, beverage, pharmaceutical, chemical and oil and gas industries for cleaning process equipment. The trigger guard and molded rubber cover are designed for operator safety and comfort.

Features:

- Heavy-duty, durable construction
- ½" Female NPT connection
- Single piece stainless steel body
- Stainless steel valve stem and components
- Comfortable hand grip
- Easy operation - designed to reduce fatigue
- Replaceable rubber body cover provides temperature insulation and protects spray nozzle from damage
- Easy repair - all components are user serviceable
- Rebuild kits are readily available
- Front loading cartridge



Materials:


- Body casting: CF8 304 SS
- Seals: Nitrile rubber o-rings and Viton™ valve seat
- Internals: 304 SS
- Cover: Nitrile Rubber

Connections:

- Inlet connection: ½" Female NPT
- (Garden hose adapters are available separately)

Rebuild kit:

- Item: RK-FT18
- Includes all o-rings and seals

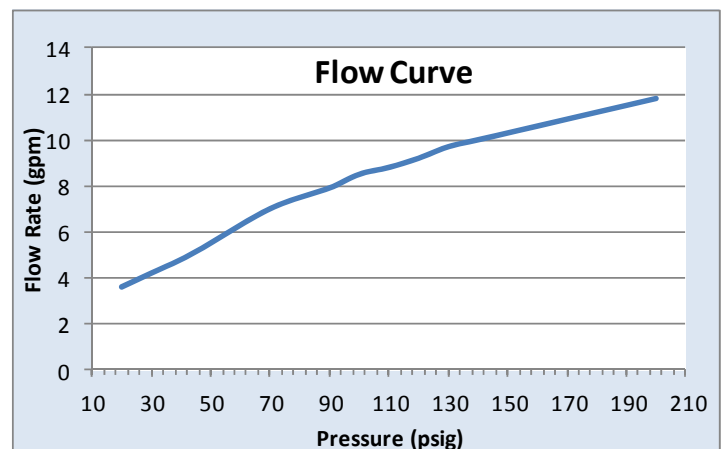

Item Number	Recommended Water Pressure	Maximum recommended discharge temperature	Outlet flow rate
FT18-SR	20 — 200 psig	200°F	4 — 12 gpm